

# EMBOUT "S" : JIC 74°


## F4J



coudé à 45°

NORMES : ISO 8434-2  
SAE J516/J514

FILETAGE : UNF  
ASME B1.1

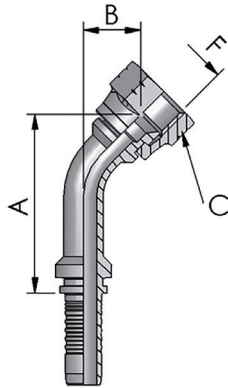

Notes

D.N.		Référence		Filetage	Dimensions (mm)				
mm	"	Code	Désignation	F	C	Ø inter.	L	A	B
6	1/4"	1510611	S06 F4J 7/16	7/16"-20	15	4,0	66,0	39,0	13,0
6	1/4"	1510613	S06 F4J 1/2	1/2"-20	17	4,0	67,0	39,0	13,0
6	1/4"	1510614	S06 F4J 9/16	9/16"-18	19	4,0	67,5	40,0	15,0
8	5/16"	1510813	S08 F4J 1/2	1/2"-20	17	5,5	74,5	46,0	16,0
8	5/16"	1510814	S08 F4J 9/16	9/16"-18	19	5,5	74,5	52,0	16,0
8	5/16"	◆	S08 F4J 3/4	3/4"-16	24	5,5	74,5	46,0	16,0
10	3/8"	1511014	S10 F4J 9/16	9/16"-18	19	7,0	81,0	54,0	16,0
10	3/8"	1511019	S10 F4J 3/4	3/4"-16	24	7,0	84,5	55,0	17,0
10	3/8"	1511022	S10 F4J 7/8	7/8"-14	27	7,0	86,0	56,0	21,5
12	1/2"	1511219	S12 F4J 3/4	3/4"-16	24	9,5	89,0	62,0	19,0
12	1/2"	1511222	S12 F4J 7/8	7/8"-14	27	9,5	96,0	64,0	21,0
12	1/2"	◆	S12 F4J 1"1/16	1"1/16-12	32	9,5	98,5	65,5	26,0
16	5/8"	1511622	S16 F4J 7/8	7/8"-14	27	12,0	113,0	74,0	21,0
16	5/8"	1511627	S16 F4J 1"1/16	1"1/16-12	32	12,0	114,5	78,0	26,0
20	3/4"	◆	S20 F4J 7/8	7/8"-14	27	14,5	126,5	85,0	31,5
20	3/4"	1512027	S20 F4J 1"1/16	1"1/16-12	32	14,5	127,0	81,0	25,0
20	3/4"	◆	S20 F4J 1"3/16	1"3/16-12	36	14,5	129,5	88,5	35,0
20	3/4"	◆	S20 F4J 1"5/16	1"5/16-12	41	14,5	132,0	91,0	28,0
25	1"	◆	S25 F4J 1"1/16	1"1/16-12	32	21,0	161,5	106,5	38,5
25	1"	1512533	S25 F4J 1"5/16	1"5/16-12	41	21,0	162,5	111,0	28,0
25	1"	◆	S25 F4J 1"5/8	1"5/8-12	50	21,0	166,0	111,0	43,0
32	1"1/4	1513241	S32 F4J 1"5/8	1"5/8-12	50	26,5	196,5	135,5	52,0
32	1"1/4	◆	S32 F4J 1"7/8	1"7/8-12	55	26,5	201,5	140,5	57,0
40	1"1/2	1514048	S40 F4J 1"7/8	1"7/8-12	55	32,0	231,0	161,0	57,0
50	2"	1515064	S50 F4J 2"1/2	2"1/2-12	70	44,0	281,0	205,5	66,5

